

# MBB R 1500 S TRUCK


# MBB R 2000 L TRUCK



- Lifting capacity 1,500/2,000 kg with four cylinders and 750/1,000 mm load distance
- Simple-fold platform
- Specially designed for installation on motor vehicles
- Optimal adaptation for different frame widths of 750 – 865 mm
- Steel/aluminium platform design
- Spring-supported folding section
- Platform housing serves as underride guard
- Steel bridging projection for espagnolettes
- Powerful cylinder for horizontal positioning of the tail lift
- Compact design thanks to a torsion-resistant steel moving frame, pre-assembled end beam and welded brackets
- Control box holder for installation on the moving unit

## LOAD DIAGRAM

MBB R 1500 S TRUCK		MBB R 2000 L TRUCK	
a (mm)	Q (kg)	a (mm)	Q (kg)
1000	1500	750	2000
1200	1250	900	1650
1500	1000	1100	1300
1850	800	1600	950

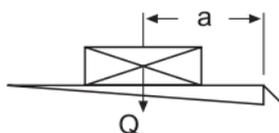

# THE SPECIAL RETRACTABLE TAIL LIFT FOR MOTOR VEHICLES

## WEIGHTS

Aluminium/aluminium platform type

Platform width (mm) 2,400

Platform height (mm)

1,805 615 kg


## WEIGHTS

Steel/aluminium platform type

Platform width (mm) 2,400

Platform height (mm)

1,800 648 kg

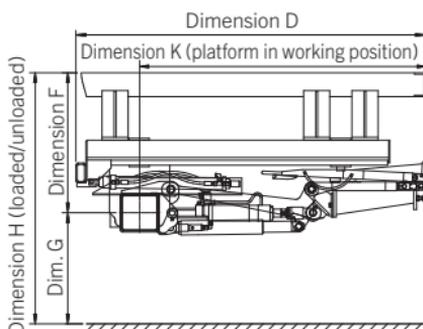

## DIMENSIONS

Lifting arm lengths (mm)	800	900
H (max.) loading height, unloaded	1,428	1,548
H (min.) loading height, loaded	916	1,006
F (max.) middle of main beam to upper edge of loading floor	817	924
K (min.) at dimension F (max.)	601	623
D (min.) installation dimension, minimum	1,870	1,970
F (min.)	566	614
K (max.) at dimension F (min.)	820	907
G (max.) unloaded (middle of main beam to ground)	611	624
G (min.) loaded	350	392
E (max.) vehicle frame width (max.)	866	866
E (min.) vehicle frame width (min.)	752	752

## TECHNICAL DATA

Type	MBB R 1500 S TRUCK	MBB R 2000 L TRUCK
Lifting capacity	1,500 kg	2,000 kg
Main beam	180 x 180 mm	180 x 180 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders / 1 moving cylinder	
Lifting arm pitch	1,300 mm	1,300 mm
Load centre, longitudinal	1,000 mm	750 mm
Load centre, across centre	Central, 50% of rated load on one side	
Inclination angle of the platform	+10° to -10°	

Some of the tail lifts pictured feature special customer-specific equipment. Country-specific regulations must be considered for the tail lift installation. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

