


## **P 200 AXE-E SMART PLUS**

**COMPACT AND AGILE ON THE ROAD  
AND DURING POSITIONING,  
MAXIMUM VERSATILITY AND  
SAFETY IN ELEVATED POSITIONS**

**LIFETIME EXCELLENCE**

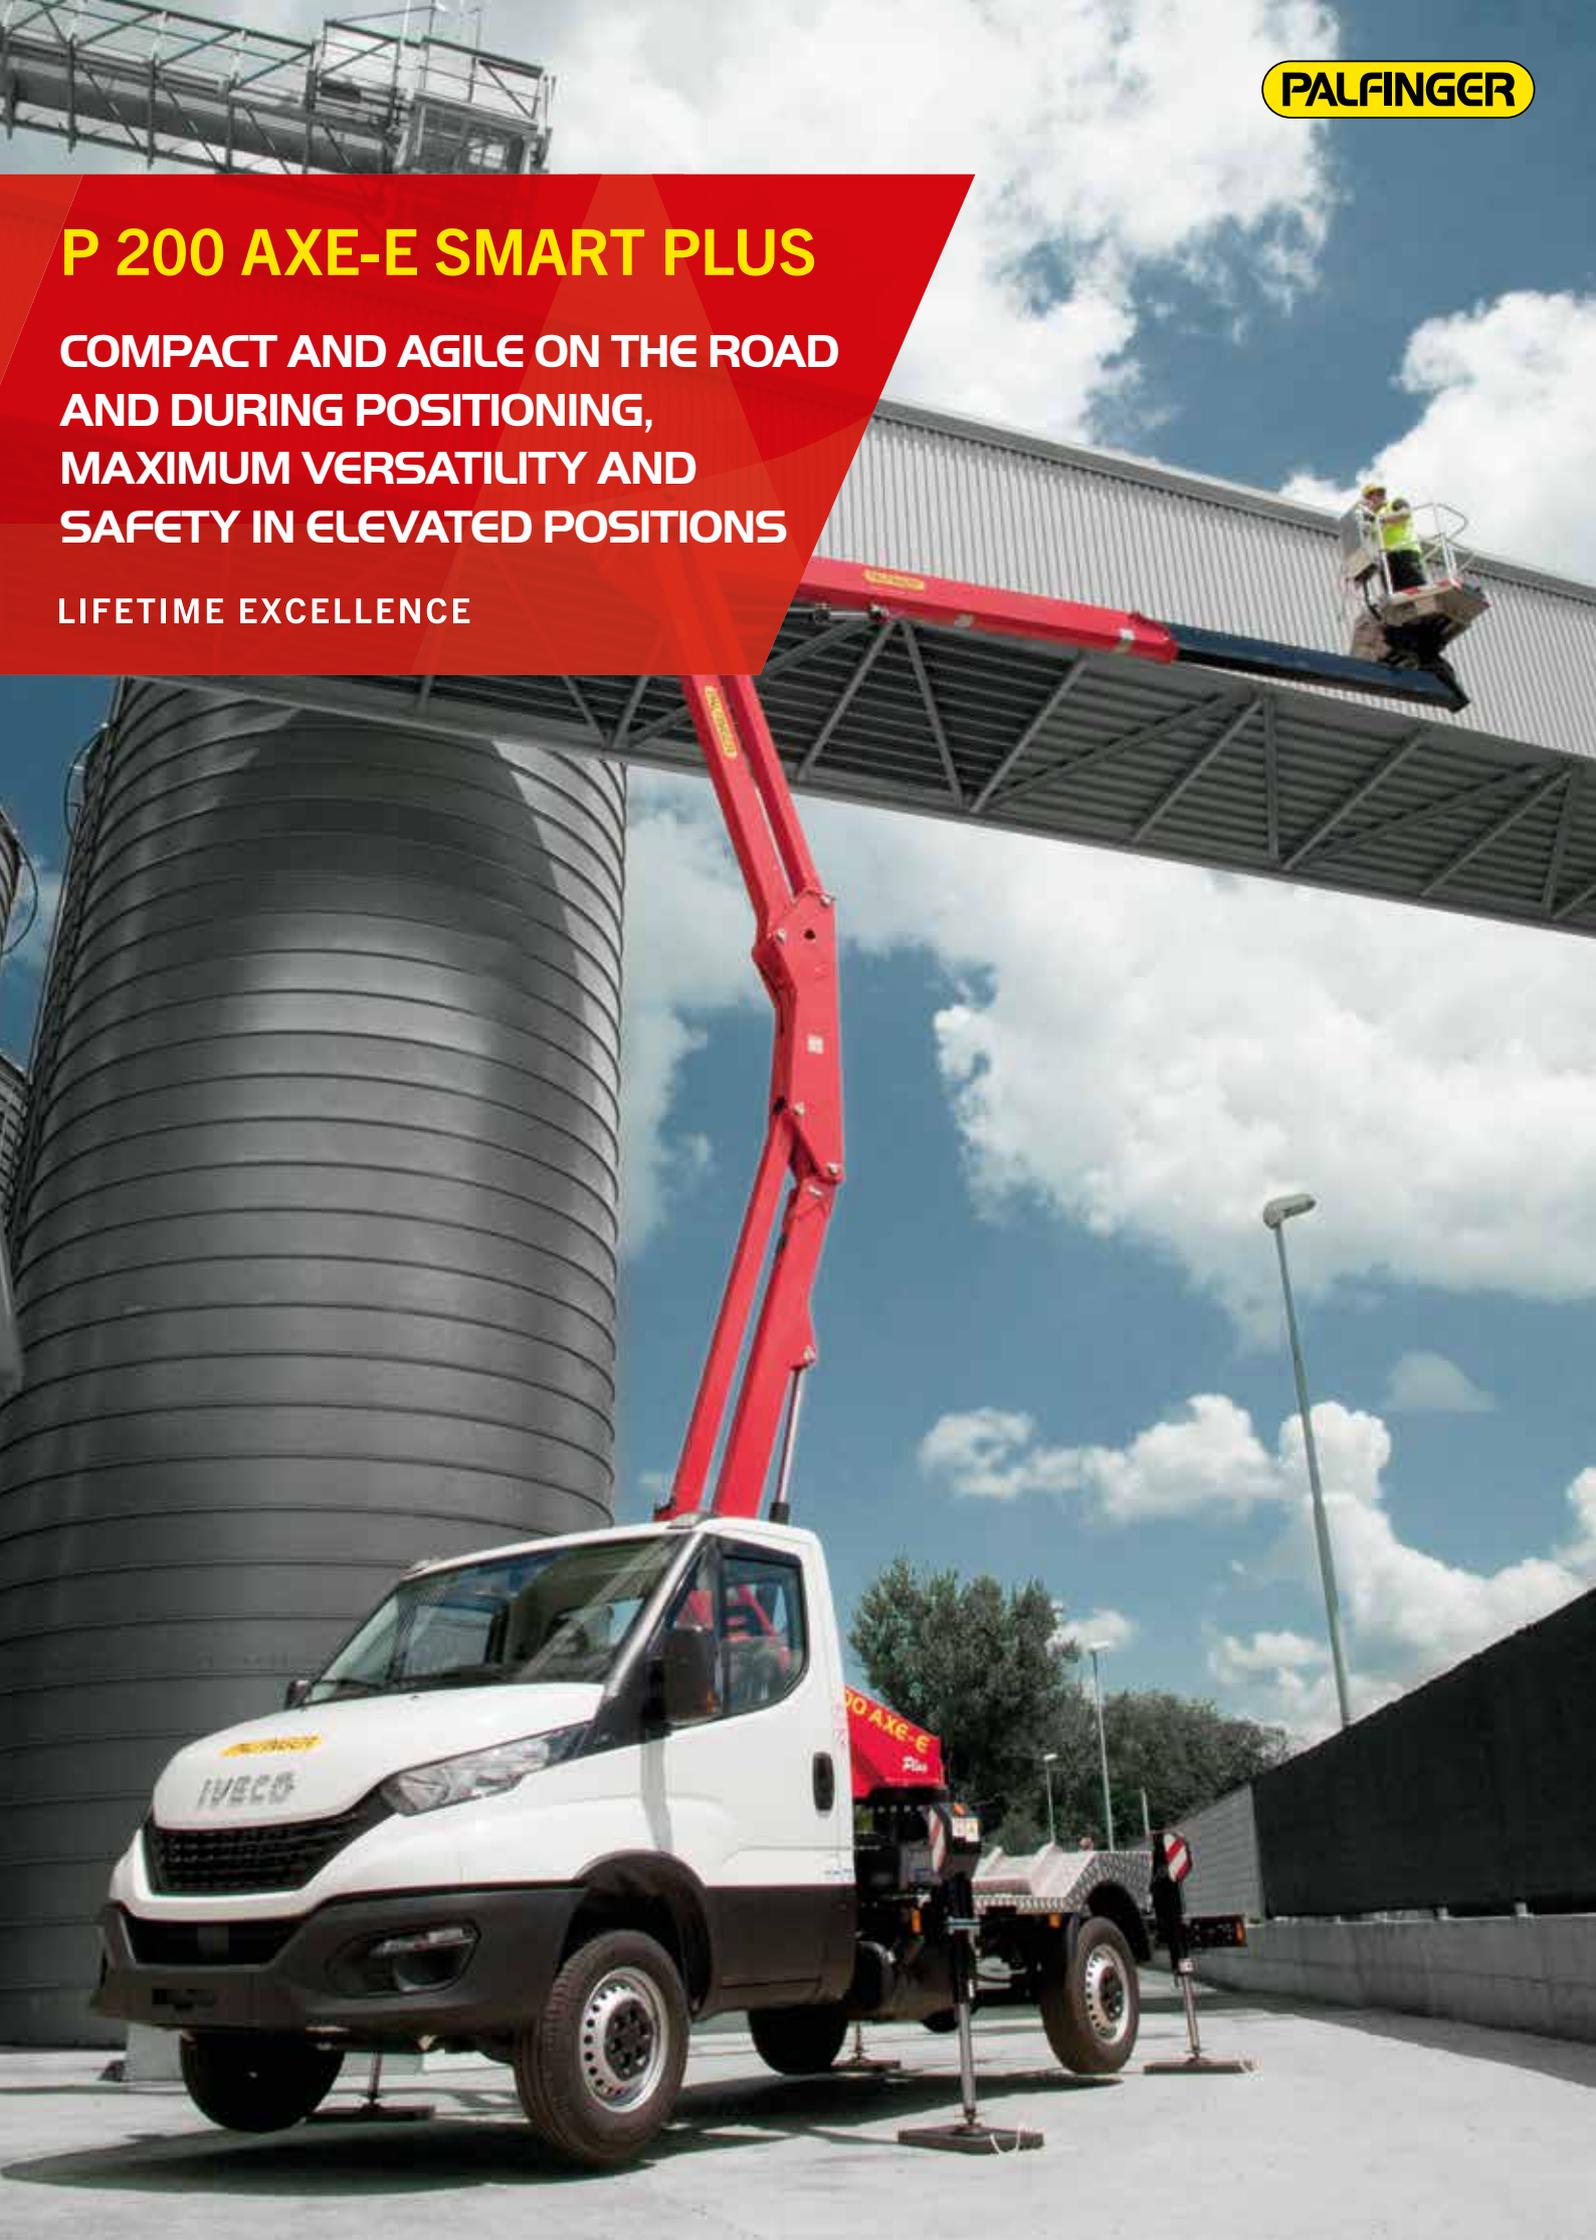

## STRENGTHS

- Lightweight and compact double articulated aerial platform for work in tight spaces, mounted on a 3.5 t truck. The double pantograph unit guarantees great versatility and the ability to move over in elevated positions.
- Multifunction electric controls for greater precision, speed, and manoeuvring comfort
- Vertical stabilisation with frontwards extending outriggers which compensate for uneven and sloping ground
- Platform with three stabilisation possibilities for each working condition:
  - Within the outer vehicle limits: for maximum compactness overall within small spaces
  - With front crossmembers extended: for maximum performance when working in elevated positions
  - Partial stabilisation: for maximum performance with minimum overall dimensions.

## STANDARD

- 12V socket on basket
- 230V / 16A socket A or 110V / 16A 12V socket on basket
- Aerial section centring display for aerial part closing
- Air/water line from the column to the basket
- Anti-collision system cab/boom
- Cage rotation 90°+ 90°
- Electric hour meter
- Inclinometer with audio alarm signal and signal lights relating to aerial work conditions
- Painting with cathaphoresis process, with KTL system patented by PALFINGER
- Preparation for insulation upgrade ability
- Set of 4 spreader plates with proper housing on the chassis
- Top boom protection.

## MAIN ACCESSORIES

- 12V electric pump for emergency lowering
- 230V / 16A or 110V / 16A electric pump with quick couplings
- Home function
- Fibreglass basket instead of the standard aluminum version
- 1000V insulation on fibreglass basket
- Flashing light at turntable
- Folding left and right side bordering h 200 mm
- Plastic storage toolbox at the rear
- Brushes kit on telescopic boom
- Side protection
- Wired remote control for emergency commands.


## DIMENSIONS



# TECHNICAL DATA

	Max. working height	19.7 m		Basket rotation	2x90°
	Max. working height from platform deck	17.7 m		Basket dimensions	m 1.4 x 0.84 x 1.1 h
	Max. working outreach	8.2 m		Max. load permitted on basket	250 kg - 230 kg (FBG)
	Min. outrigger width	2.0 m		Stabilization	Vertical, with front arms extendable hydraulically
	Max. outrigger width	3.1 m		Gross vehicle weight	3.5 t
	Operating angle of main arm	-25°/+73°			
	Turret rotation	370°			

# WORK AREA

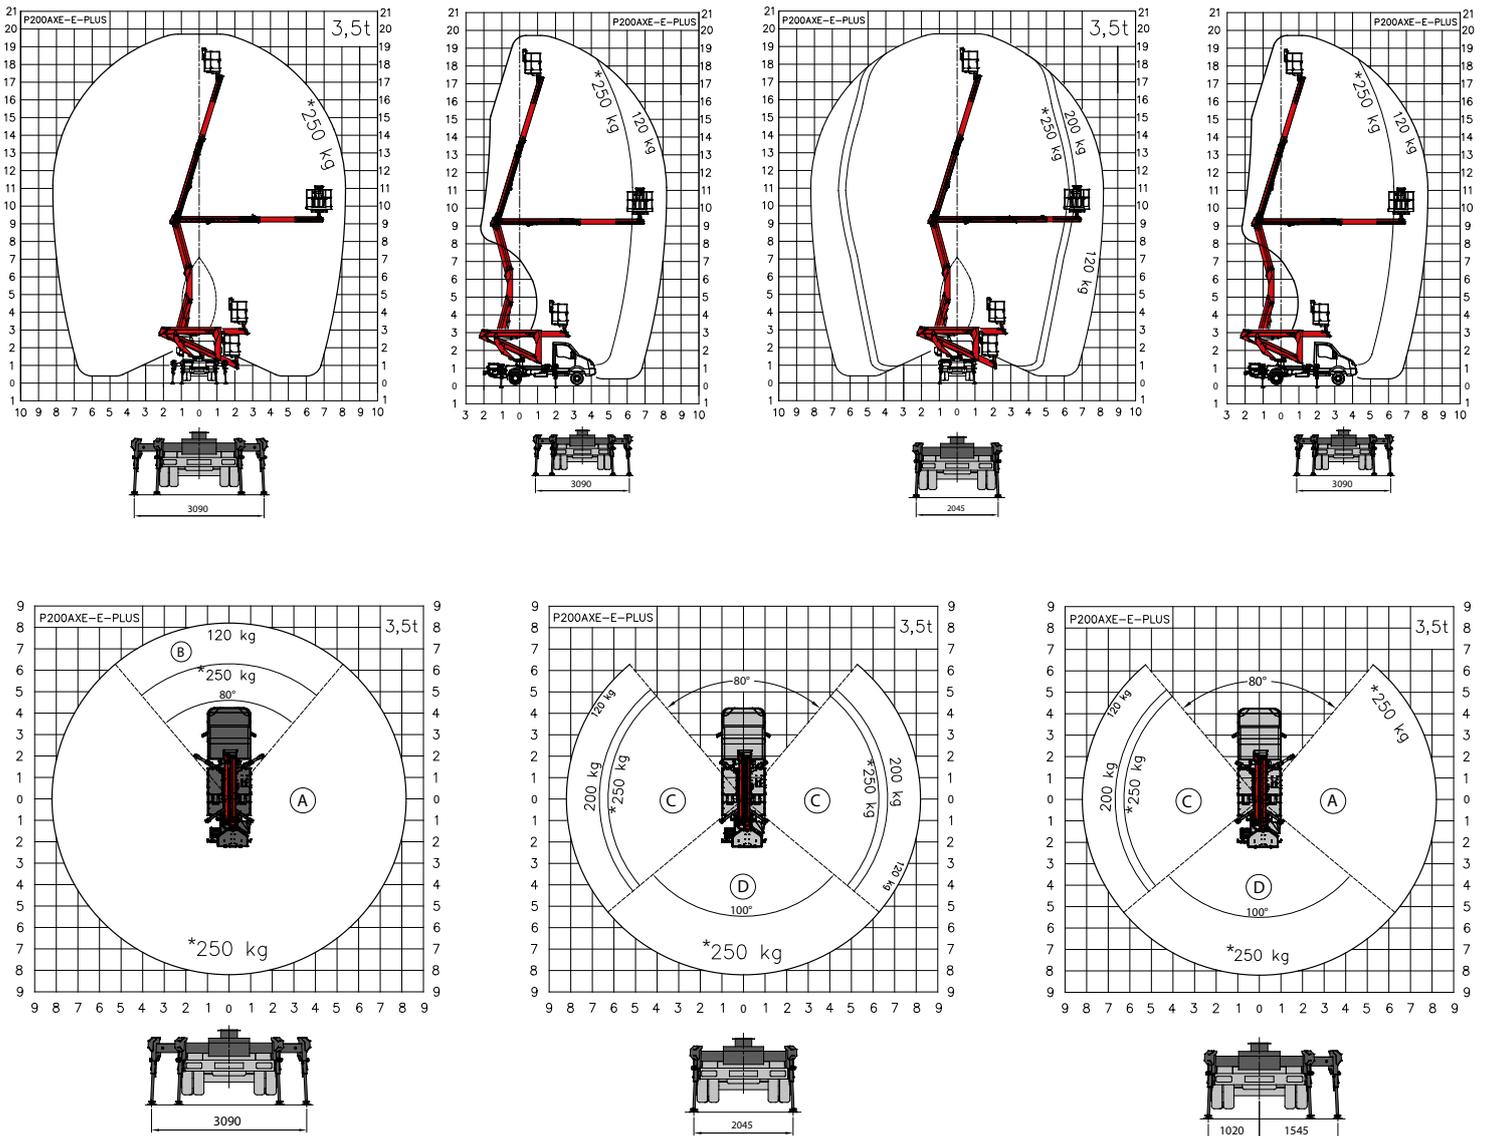

Weights may vary by +/- 5%  
 Technical data may vary by +/- 3%  
 \*230 kg for FBG basket

**CONTACT DETAILS****PALFINGER PLATFORMS ITALY SRL**

Via Enrico De Nicola, 31  
41122 Modena (MO) - Italy  
TEL: +39 059 252426  
EMAIL: [info@palfingerplatformsitaly.it](mailto:info@palfingerplatformsitaly.it)

**KP-P200AXEPM1+EN**

The illustrations in the brochure may show units equipped with optional accessories and not always the standard version. National legislation must be complied with during construction/assembly. The dimensions stated are not binding. The company cannot be held responsible for any changes in technical information, inaccuracies, or translation errors.