

# SPS 8.000 STIFF BOOM CRANE

IDEAL LIFTING SOLUTION FOR 2 AXLE TRUCKS



# TECHNICAL SPECIFICATIONS

## Product Description


- SANYPALFINGER produces according to European Quality Standards to ensure reliability, performance and safety in the industry
- Extension system boom made of high tensile steel to optimize lifting height and working range
- The wide outrigger span ensures stability in all mounting situations
- High safety factor with greater reliability
- Piston pump option for reliability, efficiency, and extended lifetime
- Standard package includes
  - Emergency stop button
  - Working light
  - High pressure filter
  - Over-winding stop

## Technical Data


Basic Data (SLD1)	SPS 8000()	SPS 8.000A	SPS 8.000B
Rated Lifting Moment	8 mt	8 mt	8 mt
Rated Lifting Capacity	3200 kg (2.5 m)	3200 kg (2.3m)	3200 kg (2.3m)
Max. outreach	7.8 m	10.2 m	10.2 m
Max. lines of the hook	4	4	4
Slewing angle	Continuous	Continuous	Continuous
Boom raising angle	0 ~ 75°	0 ~ 75°	0 ~ 75°
Max. lifting height (the measurement from the ground after the outriggers fully extended)	8.0 m	9.8 m	12.5 m
Length of the boom system (retracted)	3.4 m	3.5 m	3.5 m
Length of the boom system (fully extended)	5.7 m	8.0 m	10.4 m
Boom sections	2	3	4
Outrigger span (fully extended)	4400 (mm)	4400 (mm)	4400 (mm)
Recommended flow rate	35 L/min	35 L/min	35 L/min
Operating pressure	23 Mpa	23 Mpa	23 Mpa
Recommended oil tank capacity	30 L	30 L	30 L
Crane moment (dynamic)	103.1 kNm 10.5mt	101.3 kNm 10.3mt	101.3 kNm 10.3mt
Torsional moment (dynamic)	8.4 kNm 0.9 mt	8.4 kNm 0.9 mt	8.4 kNm 0.9 mt
Crane Weight	1076 kg (Floor Control)	1179 kg (Floor Control)	1247 kg (Floor Control)

# LIFTING CHART

SPS 8.000A

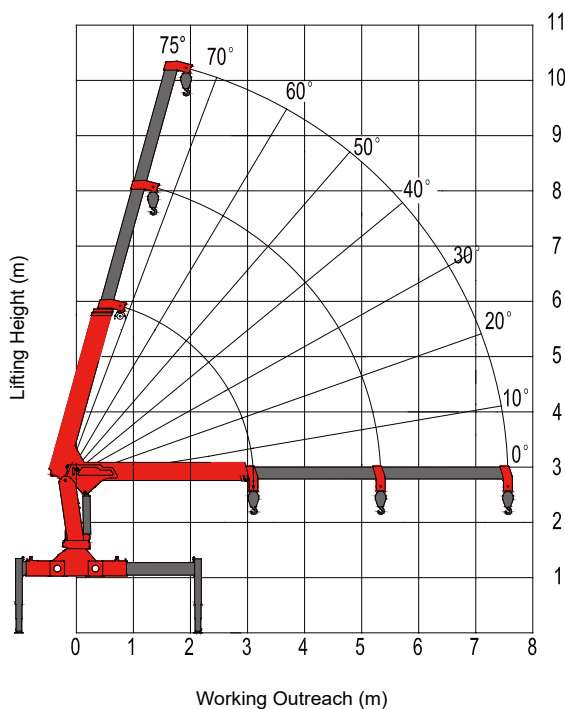

SPS 8.000B

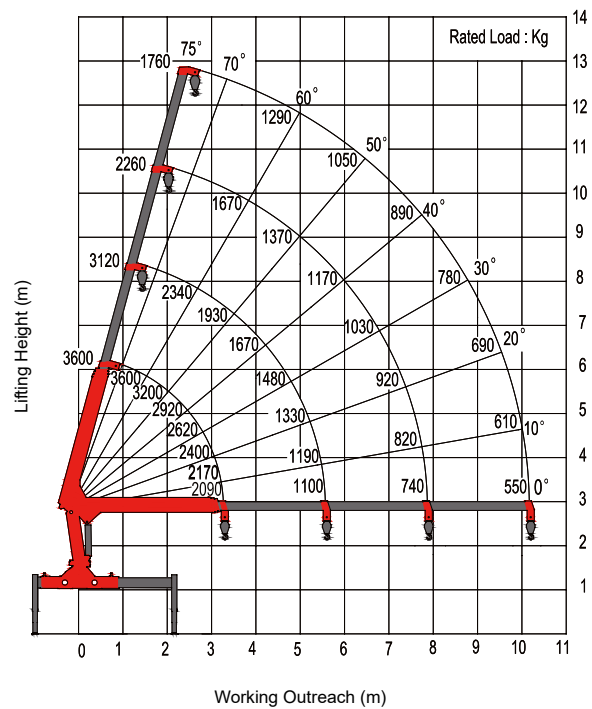


**NOTE**

Load chart may be different based on crane options.  
 The above lifting height and boom angles are based on a straight (unladen) boom.  
 Allowance should be made for boom deflection under laden conditions.  
 Lifting capacities must not exceed 85% of tipping load.


# CRANE DIMENSION

SPS 8.000B-F/L

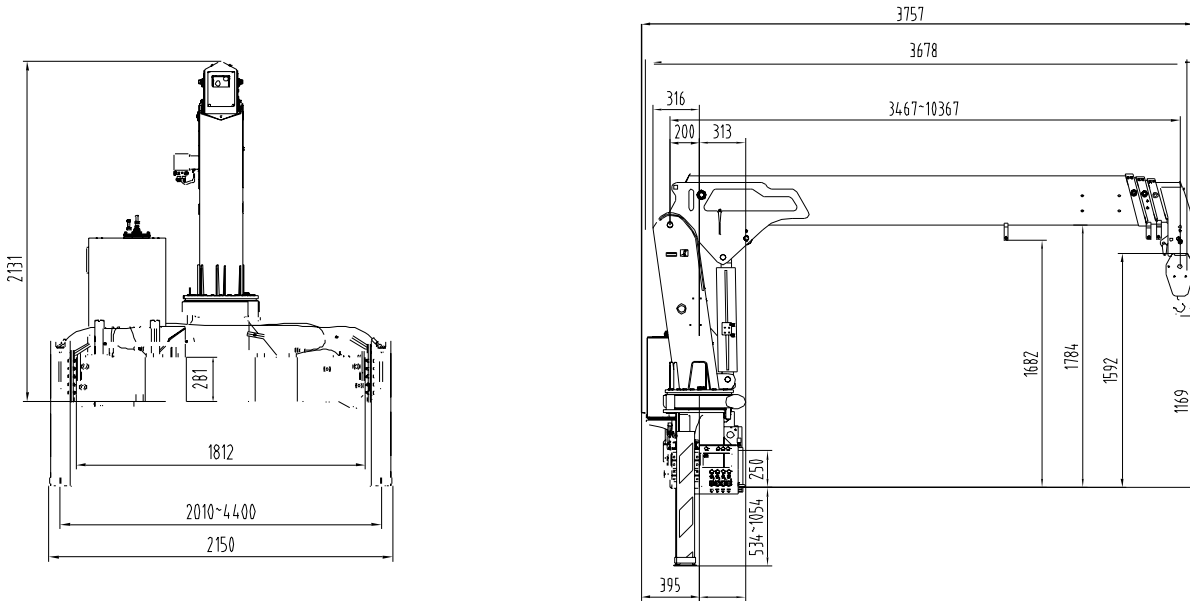

\*The actual product dimensions can vary depending on the operational equipment.

# FEATURES & OPTIONS



**Octagonal Boom Profile**

- Higher strength and rigidity provided by octogonal boom geometry



**High Tensile Steel**

- High Tensile Steel: HG785, SC960
- Able to withstand higher forces



**Overload Protection System**

- Built-in safety function
- Protects the crane against overloading



**Working Light**

- Safer operations in dusty and dark working conditions
- Optimal visibility for work



**High Pressure Filter**

- Ensures proper functionality and longer lifetime of crane



**Proportional Hydraulic System**

- Sensitive and stable controls for precise operation
- Operator is able to utilize multiple functions simultaneously



**Load Indicator**

- Provides operators with important information on possible overloading and lifting conditions

PALFINGER ASIA PACIFIC PTE LTD  
3 International Business Park  
Nordic European Center | #05-25/26  
609927 | Singapore  
T: +65 6591 9191  
asia@palfinger.com

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.