

PALFINGER

ETC MH 40 IH


ARTICULATED/TELESCOPIC—INSULATED
MAXIMUM VERSATILITY



ETC MH 40 IH



OPERATIONAL ZONE

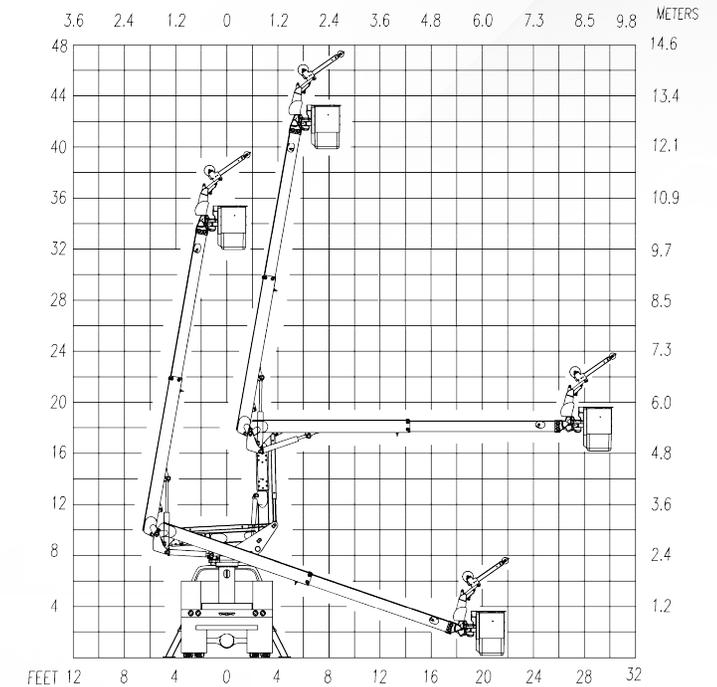

With a 40' working height, 30' side reach, a 24" x 30" bucket, and continuous rotation, the ETC MH 40 IH delivers the maneuverability and reach you expect from a PALFINGER bucket truck. Single-handle control, basket and turret full-pressure hydraulic controls with complete feathering capabilities, an extended shear ball rotation shaft, replaceable pin bushings, an emergency lowering valve, and engine start/stop at the bucket are powerful standard features

GENERAL SPECS:	Height to Bottom of Bucket 40'	Working Height 45'	Side Reach End Mount 30'	Rotation Continuous	Lower Boom Articulation -3° to 89°	Upper Boom Travel -23° to 80°	Rated Bucket Capacity 400 lbs.	
OPTIONS:	Emergency hydraulic power (12VDC)	Hydraulic tool circuit	Two-speed throttle	Bucket liner	Bucket cover	180° hydraulic bucket rotator	Outriggers	DC power options, including cab comfort
MINIMUM VEHICLE REQUIREMENTS:	GVWR (dual rear wheels) 19,500 lbs.	C.A. 84 in.	ANSI 92.2 Category C 46kV and below					

PALFINGER North America, LLC.

341 Northwest 122nd St | Oklahoma City | Oklahoma | 73114 | +1 888 748 384 | PALFINGER.COM

*All specifications are based on the 40" frame height and subject to change without notice. Bucket trucks shown in this brochure are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.