

42' WORKING HEIGHT -
ARTICULATED/TELESCOPIC - INSULATED

ETC 37 IH BUCKET TRUCK

LIFETIME EXCELLENCE



Standard Features:

- ✓ Articulating telescopic aerial lift that meets ANSI A92.2
- ✓ Insulated boom meets ANSI A92.2 Category C (46 kV and below)
- ✓ Single-hand proportional upper controls with start-stop, variable speed
- ✓ Hydraulic platform leveling; automatic or manual control for dump or operator rescue
- ✓ Hydraulic tool circuit at platform
- ✓ Adjustable boom wear pads and replaceable pin bushings
- ✓ Powder coating for better durability and corrosion protection
- ✓ Hydraulic bucket rotator (180°)
- ✓ Dielectrically tested

Standard Specifications:


Platform Height ¹	37 ft. 1 in. (11.30 m)
Working Height	42 ft. 1 in. (12.83 m)
Reach	28 ft. (8.53 m)
Platform Capacity	350 lb. (159 kg.)
Lower Boom Articulation	0 to 94°
Upper Boom Articulation	-17.5 to 74°
Stowed Travel Height	10 ft. 8 in. (3.25 m)
Rotation	Continuous

¹ Based on chassis frame height of 40 inches (1016 mm)

Requirements:

Vehicle Chassis	16,000 lb. (7,258 kg) GVWR ² (6,000 lb. (2,722 kg) GAWR front and 11,000 lb. (4,990 kg) GAWR rear) with 60 in. (1,524 mm) min. cab to axle
Hydraulic System	Open-center, 4.5 – 5.5 gal/min (17-21 L/min) at 2,250 psi (155 bar)

² Required GVWR can vary with chassis, aerial lift mounting location, service body, accessories, and desired payload.

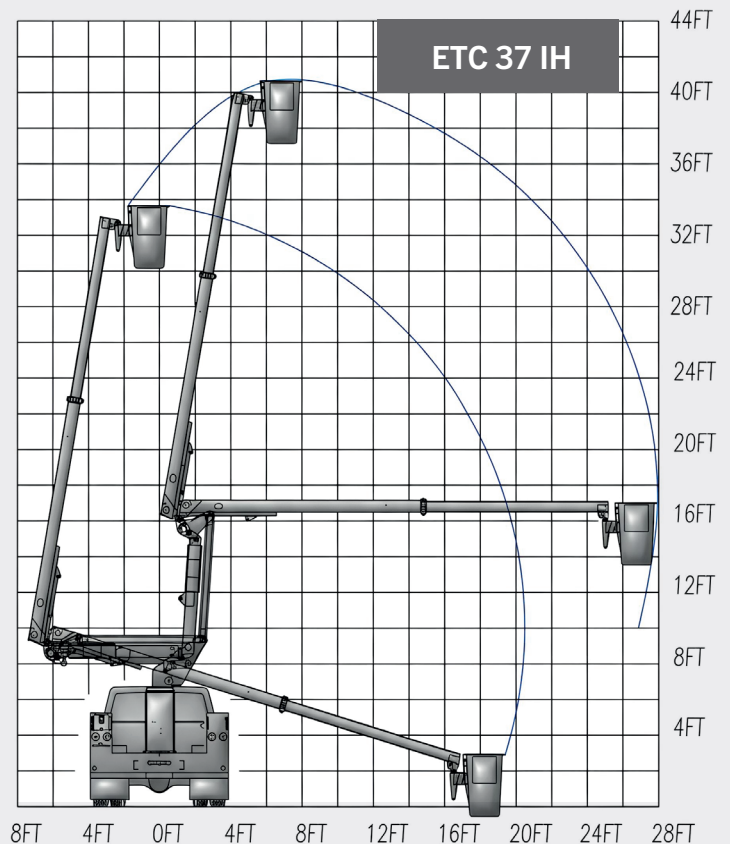



PRECISION AT YOUR FINGERTIPS

Our multi-function joystick and fully hydraulic upper controls deliver smooth, intuitive control, helping operators work faster and more efficiently.



PROVEN PERFORMANCE. MAXIMUM VALUE.

Backed by decades of trusted design and field success, this insulated lift delivers the most cost-effective solution in its class. Mountable on a Class 4 or Class 5 chassis.



EXPERT CARE. ALWAYS WITHIN REACH.

Your uptime is our priority. With over 100 mobile field units and nationwide service centers, we bring preventative maintenance and repairs right to your site.



Palfinger North America, LLC
341 NW 122nd
Oklahoma City, OK 73114
T +1 888 748 3841
F +1 405 755 6829

WWW.PALFINGER.COM



Designed and Assembled in the USA

Disclaimer:

All specifications are based on the 40" frame height and subject to change without notice. Bucket trucks shown on this flyer are optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

NAM_AWP_ETC35SNT_EN I9/25