


The PALFINGER logo is located in the top right corner of the image. It consists of the word "PALFINGER" in a bold, black, sans-serif font, enclosed within a yellow rounded rectangular border.The main title "PBO 5548 IM" is displayed in large, white, bold, sans-serif font on a red, angular background that overlaps the utility truck and the power line. The truck is a white utility vehicle with a long, white, telescopic boom extending upwards. A worker in a yellow safety vest and white hard hat is positioned in a bucket at the end of the boom, working on a wooden utility pole. The pole has several electrical components, including transformers and insulators. The background shows a clear blue sky with scattered white clouds and a green field with other utility poles in the distance.

OVERCENTER—INSULATED
MATERIAL HANDLING

PBO 5548 IM



OPERATIONAL ZONE

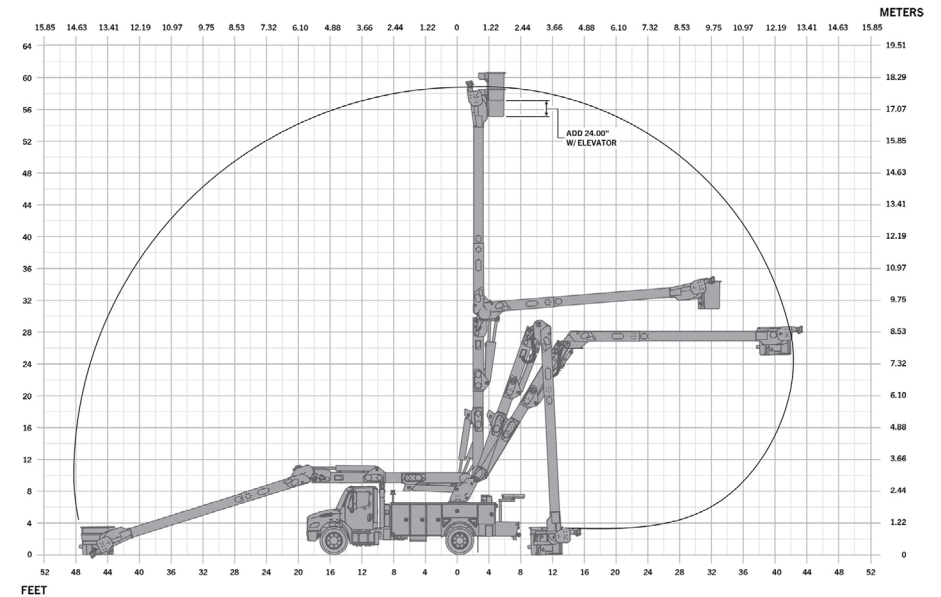

The **PBO 5548 IM** is an insulated bucket truck designed for smooth and safe boom placement, reducing operator fatigue during long workdays on power lines. It offers a working height of up to 60 feet and a side reach of 48 feet 7 inches. The aerial unit features customer-specified design improvements for ease of service, lower cost of ownership, enhanced safety, and performance. It includes a jib working position with a 900 lb capacity and can lift up to 2,000 lbs of materials when the boom is at a 60° angle. The PBO 5548 IM also boasts superior aerial function speeds, smooth variable boom control functions, and best-in-class minimum boom deflection for increased stability.

GENERAL SPECS:	Height to Bottom of Bucket	Working Height	Side Reach, Over-center	Side Reach, Non-Over-center	Rotation	Lower Boom Articulation	Upper Boom Travel	Stowed Height	Rated Bucket Capacity	Winch Capacity
	55' 57' with elevator	60' 62' with elevator	48' 7"	44' 1"	360° Continuous	0° -> 121°	-8° -> 195°	11' 9"	Up to 800 lbs	Up to 2,000 lbs

MINIMUM VEHICLE REQUIREMENTS:	GVWR (dual rear wheels)	C.A.	ANSI
	33,000 lbs	124"	92.2 Category C 46kV and below

PALFINGER North America, LLC.

341 Northwest 122nd St | Oklahoma City | Oklahoma | 73114 | +1 888 748 384 | PALFINGER.COM

*All specifications are based on the 40" frame height and subject to change without notice. Bucket trucks shown in this brochure are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.