

**PALFINGER**

**43' WORKING HEIGHT -  
ARTICULATED/TELESCOPIC - NON-INSULATED**

# PB 38 AT P CABLE PLACER

LIFETIME EXCELLENCE



## Standard Features:

- ✓ Articulating telescopic cable placer that meets or exceeds ANSI A92.2
- ✓ Non-insulated boom
- ✓ Proportional upper controls with start-stop, variable speed, and emergency descent valve
- ✓ Hydraulic platform leveling: Automatic or manual control for dump or operator rescue
- ✓ Adjustable boom wear pads and replaceable pin bushings
- ✓ Powder coating for better durability and corrosion protection
- ✓ Fully functional tested

## Standard Specifications:

Platform Height <sup>1</sup>	38 ft. (11.58 m)
Working Height	43 ft. (13.10 m)
Reach	27 ft. 2 in. (8.28 m)
Side Pull Rating	400 lbs. (181 kg.)
Lower Boom Articulation	0 to 96°
Upper Boom Articulation	-21 to 76°
Stowed Travel Height	9 ft. 7 in. (2.92 m)
Rotation	Non-continuous, 375°
Platform Capacity	400 lbs. (181 kg.)
Vehicle Speed	10 mph (16 km/h) max.


<sup>1</sup> Based on chassis frame height of 40 inches (1016 mm)

## Requirements:

Vehicle Chassis	19,500 lb. (8,845 kg) GVWR <sup>2</sup> (7,000 lb. (3,175 kg) GAWR front and 13,500 lb. (6,123 kg) GAWR rear) with 84 in. (2,134 mm) min. cab to axle
-----------------	---

Hydraulic System	Open-Center, 5.5 gal/min (21 L/min) at 2,400 psi (165 bar)
------------------	--

<sup>2</sup> Required GVWR can vary with chassis, aerial lift mounting location, service body, accessories, and desired payload.

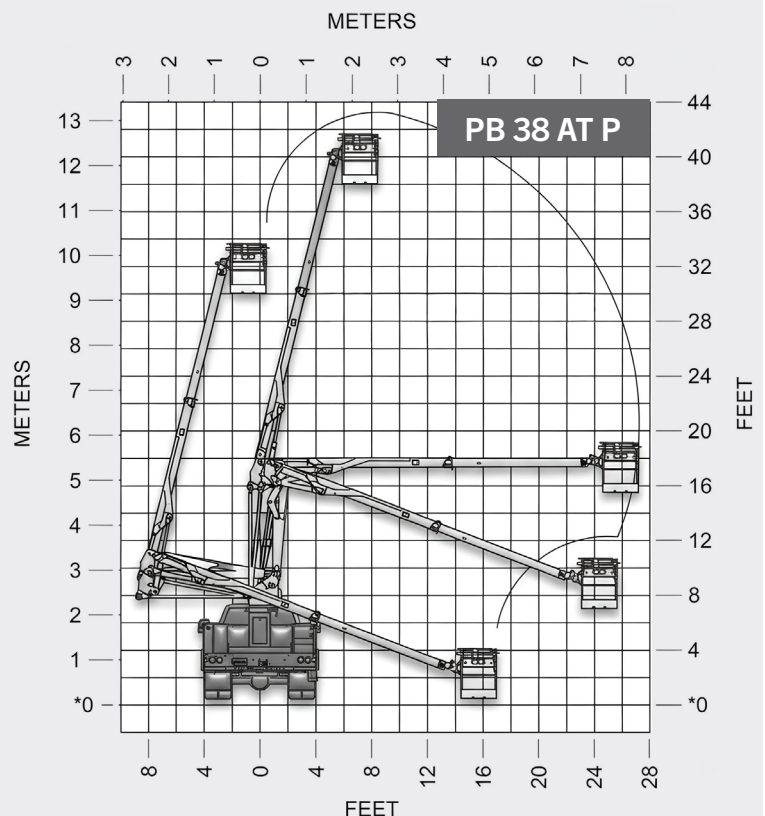


## **EASY ACCESS. MORE CARGO.**

Enter the platform safely from the tail shelf or use the flexible stowage area to free up more room for your cargo needs.



## **BUILT TO LAST**

Built from galvanized steel, this platform resists corrosion and stands up to the toughest conditions.

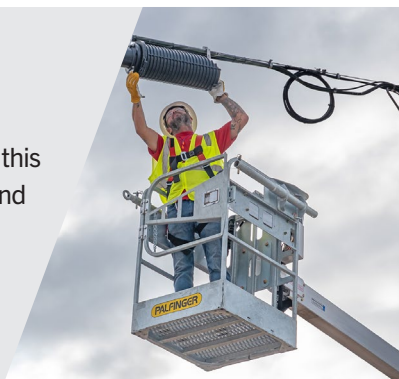


## **REPLACE THE PART. NOT THE BASKET.**

These pockets securely hold fork arms, perfect for routing cable or storing stringing equipment. If they get damaged on the job, they can be quickly replaced.



## **TRUE ONE-HANDED OPERATION**

Our control layout frees up your second hand for tools, materials, or added stability, helping you to work smarter, faster and safer.

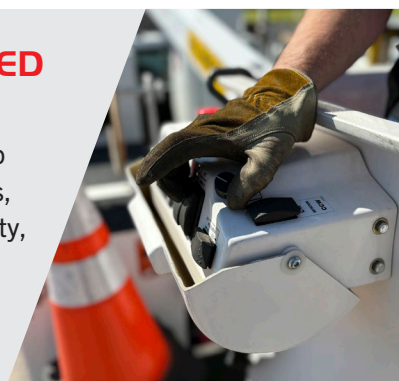

## **EXPERT CARE. ALWAYS WITHIN REACH.**

Your uptime is our priority. With over 100 mobile field units and nationwide service centers, we bring preventative maintenance and repairs right to your site.



Palfinger North America, LLC  
341 NW 122nd  
Oklahoma City, OK 73114  
T +1 888 748 3841  
F +1 405 755 6829

[WWW.PALFINGER.COM](http://WWW.PALFINGER.COM)



Designed and Assembled in the USA

### Disclaimer:

All specifications are based on the 40" frame height and subject to change without notice. Bucket trucks shown on this flyer are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

NAM\_AWP\_PB38ATP\_EN I9/25