


## MBB C 1500 S



- One of the strongest tail lifts in its class
- 1,500 kg lifting capacity with large load distance of 1,000 mm
- Four-cylinder lifting mechanism with five different lifting arm lengths
- Designed with aluminium or steel platform
- Large selection of special equipment available

### LOAD DIAGRAM


a (mm)	Q (kg)
1,000	1500
1,200	1250
1,500	1000
1,850	800
2,400	600



# OPTIMUM LIFTING POWER WITH LARGE LOAD DISTANCE

## WEIGHTS

Aluminium platform type	
platform width (mm)	2,500
platform height (mm)	
1,800	517 kg
2,050	535 kg
2,100	539 kg
Steel platform type	
platform width (mm)	2500
platform height (mm)	
2,009	685 kg
2,109	735 kg

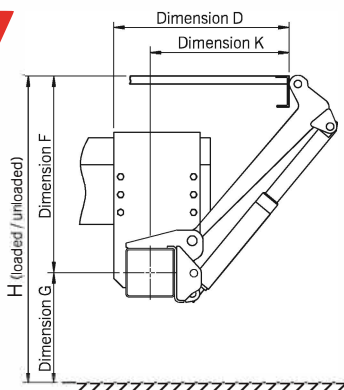

## DIMENSIONS

Lifting arm lengths (mm)	700	800	900	1,000	1,100
H (max.) loading height, unloaded	1,200	1,428	1,528	1,651	1,793
H (min.) loading height, loaded	883	916	1,006	950	1,023
F (max.) middle of main beam to upper edge of loading floor	650	817	924	977	1,056
K (min.) at dimension F (max.)	618	601	623	721	783
D (min.) installation dimension, minimum	768	751	773	871	933
F (min.)	508	566	614	569	608
K (max.) at dimension F (min.)	726	820	907	1,040	1,132
D (max.) installation dimension, maximum	876	970	1,057	1,190	1,282

## TECHNICAL DATA

Type	MBB C 1500 S
Lifting capacity	1,500 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders
Platform overlap with floor	-63 mm
Lifting arm pitch	1,300 mm
Load centre, longitudinal	1,000 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to -10°

Some of the tail lifts pictured feature special customer-specific equipment. Country-specific regulations must be considered for the tail lift installation. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

