

MBB C 2500 SK

FOR TRUCKS WITH SHORT CUPPLING SYSTEM

LIFETIME EXCELLENCE




MBB C 2500 SK

THE POWERFUL TAIL LIFT

MBB C 2500 SK

- 2500 kg lifting capacity at 1000 mm load centre
- Especially for extreme brightness of the beverage and food logistic
- Installation on the truck with low-mount couplings
- Available with aluminium or steel platform
- Hydraulic underrun protection

LOAD DIAGRAM

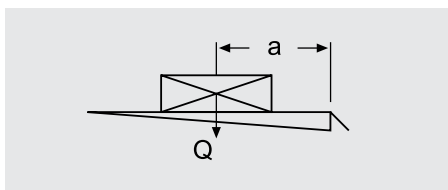

MBB C 2500 SK	
a (mm)	Q (kg)
1000	2500
1400	1785
1600	1560
1800	1385
2400	1040

WEIGHTS


Platform type	depth (mm)	width (mm)	weight (kg)
Steel	1809	2400	903
Steel	2009	2400	933
Steel	2409	2400	992
Alum.	2200	2500	754

TECHNICAL DATA

	MBB C 2500 SK
Lifting capacity	2500 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 x liftcylinder / 2 x tiltcylinder
Platform overlap with floor	- 72 mm
Lift arm pitch	1300 mm
Load centre - longitudinal	1000 mm
Load centre - lateral	50 % of the full load on one side
Inclination angle of the platform	+90° to - 10°

DIMENSIONS

Lift arms (in mm)	1100
H (max.) loading height unloaded	1557
H (min.) loading height loaded	920
F (max.) middle of main beam to upper edge of loading floor	820
K (min.) at dimension F (max.)	1024
D (min.) installation space	1189
F (min.)	420
K (max.) at dimension F (min.)	1189
D (max.) installation space	1354

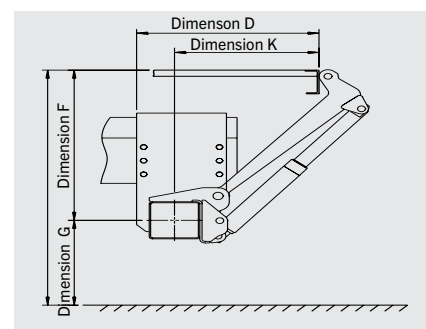

PALFINGER TAIL LIFTS GmbH
 Fockestraße 53
 27777 Ganderkesee
 Germany
www.palfinger.com

