

C 500 VAN

THE LIGHTWEIGHT WITH 500 KG LIFTING CAPACITY

LIFETIME EXCELLENCE




C 500 VAN

THE PANEL VAN CANTILEVER LIFT

C 500 VAN

- Individual installation kits for all common van types
- Fast and simple attachment
- Optimum relationship between lifting capacity and weight
- Removable ball-head coupling optionally available
- Cylinder located in the lifting gear
- Equipped with roll stop (900 mm) and bridging plate as standard

LOAD DIAGRAM

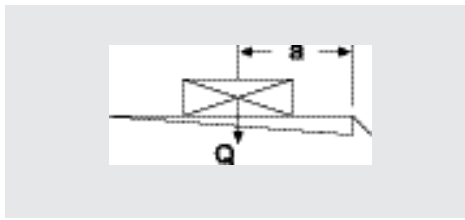

C 500 VAN	
a (mm)	Q (kg)
600	500
700	430
820	360
1,120	260

WEIGHTS

Platformtype	width(mm)	depth (mm)	weight (kg)
Alum. platform	1,400	1,575	from 151


TECHNICAL DATA

Lifting capacity	500 kg (600 optional)
Main beam	120 x 80 mm
Lifting gear hydraulics	1 x lifting cylinder / 1 x tilting cylinder
Platform overlap with floor	-
Lift arm pitch	510 mm
Load centre - longitudinal	600 mm
Load centre - across centre	50 % of the full load on one side
Inclination angle of the platform	+90° bis -10°

DIMENSIONS

Lift arms (in mm)	500
H (max.) Loading height unloaded*	780
H (min.) Loading height loaded*	450
F (max.) middle of main beam to upper edge of loading floor	340
K (min.) at dimension F (max.)	546
D (min.) Installation space (min.)	814 (926)
F (min.)	-
K (max.) at dimension F (min.)	-
D (max.) installation space (max.)	-

* Depending on vehicle.

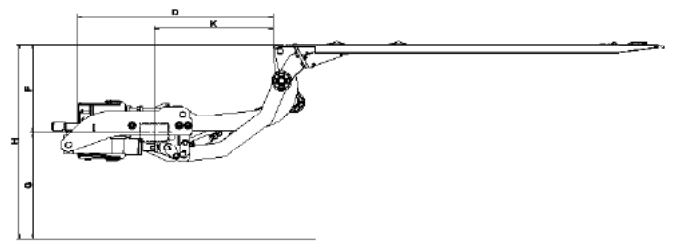

AVAILABLE FOR

- Mercedes-Benz Springer 3 / 5
- Volkswagen Crafter and MAN TGE
- Iveco Daily
- Citroen Jumper (Relay) / Fiat Ducato / Peugeot Boxer
- Ford Transit
- Renault Master / Opel Movano / Nissan NV 400
- Further vehicle types on request

PALFINGER TAIL LIFTS GmbH
 Fockestraße 53
 27777 Ganderkesee
 Germany
www.palfinger.com

