



# MCC INSTALLATION

## PRODUCT- DESCRIPTION



MOUNTING  
COMPETENCE CENTER

# BUILDING MATERIAL TRUCK PK 24.001 SLD 5 MODULAR LOW BUILT PLATFORM SHORT VERSION

EUROPEAN STANDARD



## THE PLATFORM

### LOW AND VERSATILE



The platform with integrated cutouts for the mudguards is attached laterally to the subframe to keep the loading height as low as possible.

## LOAD SECURING



The 45° bevelled border profile has integrated lashing holes approx. every 170mm. With the 6 lashing ladders across the platform, the load can be additionally secured with poles and straps.

## SIDE WALLS



The platform is framed by side walls made of anodized aluminium side walls. At the rear there are 2 side-hinged doors, which can be opened and dismantled individually. The front wall consists of a solid steel frame with 2 galvanized extensions for the transportation of long goods.

## EVERYTHING TIDIED UP




A large stainless steel box is installed on the left and right side. Stabilizer plate holders and wheel chocks are mounted ready to hand.

## WELL ILLUMINATED



2 LED working lights and 6 LED reversing lights provide optimal illumination of the site. In addition, this vehicle is also equipped with 6 flashing lights and 2 outline lamps.

TRUCK SPEZIFIATION	SCANIA G410 B6x2*4NB
<b>Wheelbase</b>	4750+1350mm
<b>Required overhang</b>	2000mm
<b>Exhaust pipe</b>	To the rear
<b>Cabin</b>	17dm (M)
<b>Trailer coupling</b>	From truck manufacturer
<b>Side marker lights</b>	From truck manufacturer
<b>Wheel chocks</b>	From truck manufacturer

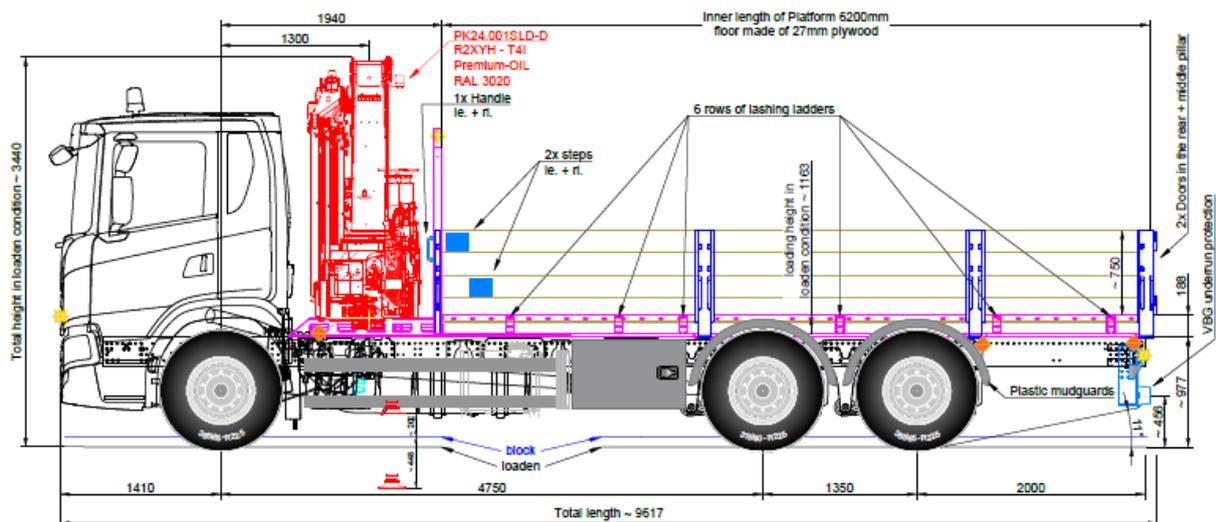

<b>INSTALLATION-SPEZIFICATION</b>	<b>Cranes 18-30mt</b>
<b>Position of the crane</b>	Front (CR-30-LKW-ML-F)
<b>Platform</b>	PALFINGER Modular low built platform (PLAT-2201)
<b>Platform length</b>	approx. 6200mm
<b>Front wall</b>	PALFINGER multifunctional front wall (FW-01-ML) With 2 extension (FW-BEAM-ML)
<b>Front wall height</b>	approx. 1700mm
<b>Side wall height</b>	800mm (WALL-800-ML)
<b>Rear wall</b>	2 doors (RWALL-DOOR-ML)
<b>Coating</b>	Platform galvanized and painted (GAL-RAL-PL)
<b>Step-ups</b>	At 2 positions (2-STEP-ML)
<b>Mudguard</b>	2 pcs. plastic single axle, black (GUARD-01)
<b>Side collision protection</b>	Standard (SPRO-STD)
<b>Underrun protection</b>	VBG aluminium (URP-VBG)
<b>Toolboxes</b>	2 pcs. standard stainless steel M (BOX-60)
<b>Stabilizer plate holder</b>	2 pcs. standard (PLATE-STD)
<b>Lighting</b>	2 pcs. LED working light (LED-WORK-2) 6 pcs. LED reversing light (LED-REAR-6) 6 pcs. flashing light (FLASH-6) 2 psc. outline lamps (OUTLINE) Side marker lights (SIDE)
<b>Rear light cover</b>	Made of polished stainless steel (RL-COV-02)
<b>Battery charger</b>	Installation in the cabin (RC-CR)
<b>HPSC-Setting</b>	Crane (HPSC-30)

